WARRANTY: The manufacturer warrants to the original consumer that this product is in good working order for a period of one year from the date of manufacture or date of purchase. During this period, the product will be repaired or replaced without charge for either parts or labor. Repair or replacement as provided under this warranty is the exclusive remedy of the purchaser.

© 2011 Byte Brothers, Inc.
Parts made in China
Assembled in the USA

WWW.BYTEBROTHERS.COM

ByteBrothers™
Test, Monitor and Repair Tools
7003 132nd Place SE, Newcastle, WA 98059 USA
+1.425.917.8380 ● FAX +1.425.917.8379 ● cs@bytebrothers.com

VTX025

CCTV

Color

MINI MONITOR 2.5™

FULL FEATURE COLOR CCTV MONITOR

USES AT HOME, WORK OR ON THE JOB

The Mini Monitor 2.5 is a full-featured color CCTV monitor that can be used in the same places as full sized monitors. It just has a much smaller footprint, allowing you to place the monitor in locations that were not practical before. In wrist strap mode (included), it is perfect for adjusting and focusing CCTV cameras.

WHERE TO PLACE THE MINI MONITOR 2.5

- ✔ Next to your computer's keyboard, monitoring the lobby door.
- ✔ On the kitchen counter, watching the house entrance.
- ✔ On the top of a cash register for an extra viewing angle of the beer aisle.
- ✔ In the sewing room watching the baby's crib.
- ✔ Above the kitchen sink watching the swimming pool.
- ✔ At the back of the store watching the front of the store.
- ✔ On your wrist (in portable mode), to adjust a CCTV camera.

TECHNICAL FEATURES

- ✔ 2.5" diagonal color active matrix LCD (480x234 pixel resolution).
- ✔ Color and brightness controls.
- ✔ Video chip: Intersil's® NTSC/PAL compatible single chip video decoder. It is durable and consumes very little power.
- ✔ Dual power: AC adapter and Li-ion rechargeable battery.
- ✔ Video input: 1.0Vpp 75ohm.
- ✔ Battery: 3.7V L-ion, 1000 maH (BP-6M).
- ✔ Power usage: 1.2W
- ✔ Dimensions: 3.35" x 2.57" x .82" (85 x 64 x 21 mm).
- ✔ Weight: 3oz (90g)

VTX025 KIT CONTENTS

- ✔ 480x234 pixel color CCTV monitor.
- ✔ BNC connecting cable 3.3' (1M).
- ✔ AC wall charger. 100-240VAC input (5V output).
- ✔ Battery: 3.7V L-ion, 1000maH (BP-6M).
- ✔ Metal desk stand. Wrist strap.
- ✔ Carrying pouch.

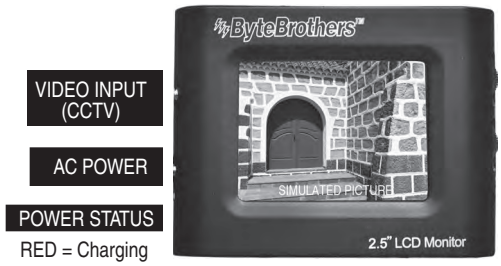

Adjusting CCTV cameras
Wristband mode (battery powered)

Desktop security mode
Stand included (AC power)

OPERATION

The Mini Monitor 2.5 is a full-featured color CCTV security monitor that can be connected to any CCTV system. In addition, its light weight and low power consumption make it the perfect tool for adjusting and focusing CCTV cameras (see picture above).

Battery: If you plan to use the Mini Monitor 2.5's battery, give it a full charge (about 2 hours to charge) and a full discharge (about 4 hours) before using. This will extend the battery life. Batteries are consumables and the better you treat them, the longer they will last. If you are using the Mini Monitor 2.5 in AC mode, the battery does not need to be installed.

Connection: Use the BNC cable to connect the Mini Monitor 2.5's to a CCTV camera. Slide the power switch to the ON position and adjust the color and brightness to preference.